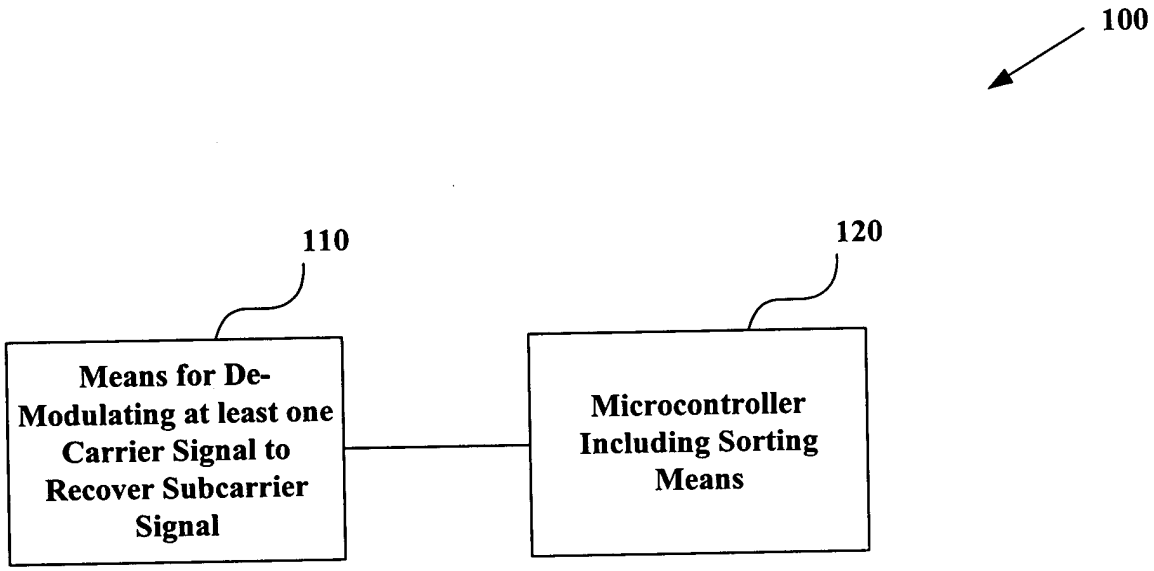
100
110
120
Means for De-Modulating at least one Carrier Signal to Recover Subcarrier Signal
Microcontroller Including Sorting Means

Fig.1.

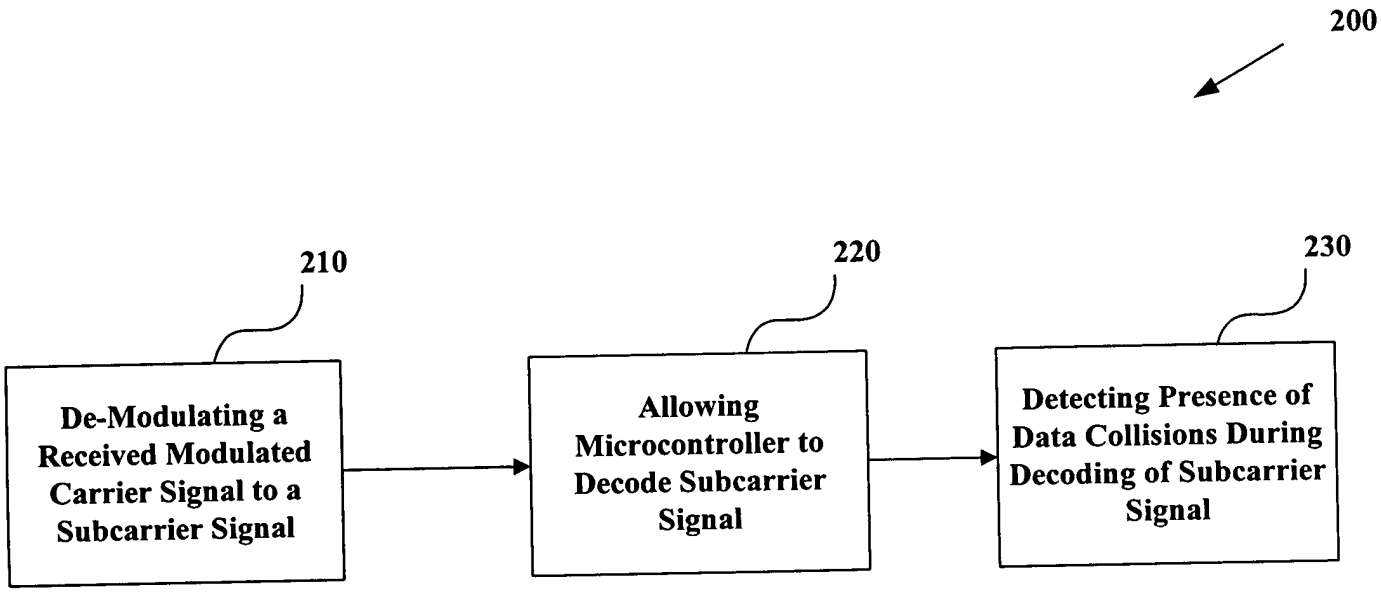
200
210
De-Modulating a Received Modulated Carrier Signal to a Subcarrier Signal
220
Allowing Microcontroller to Decode Subcarrier Signal
230
Detecting Presence of Data Collisions During Decoding of Subcarrier Signal

Fig.2.

Fig. 3

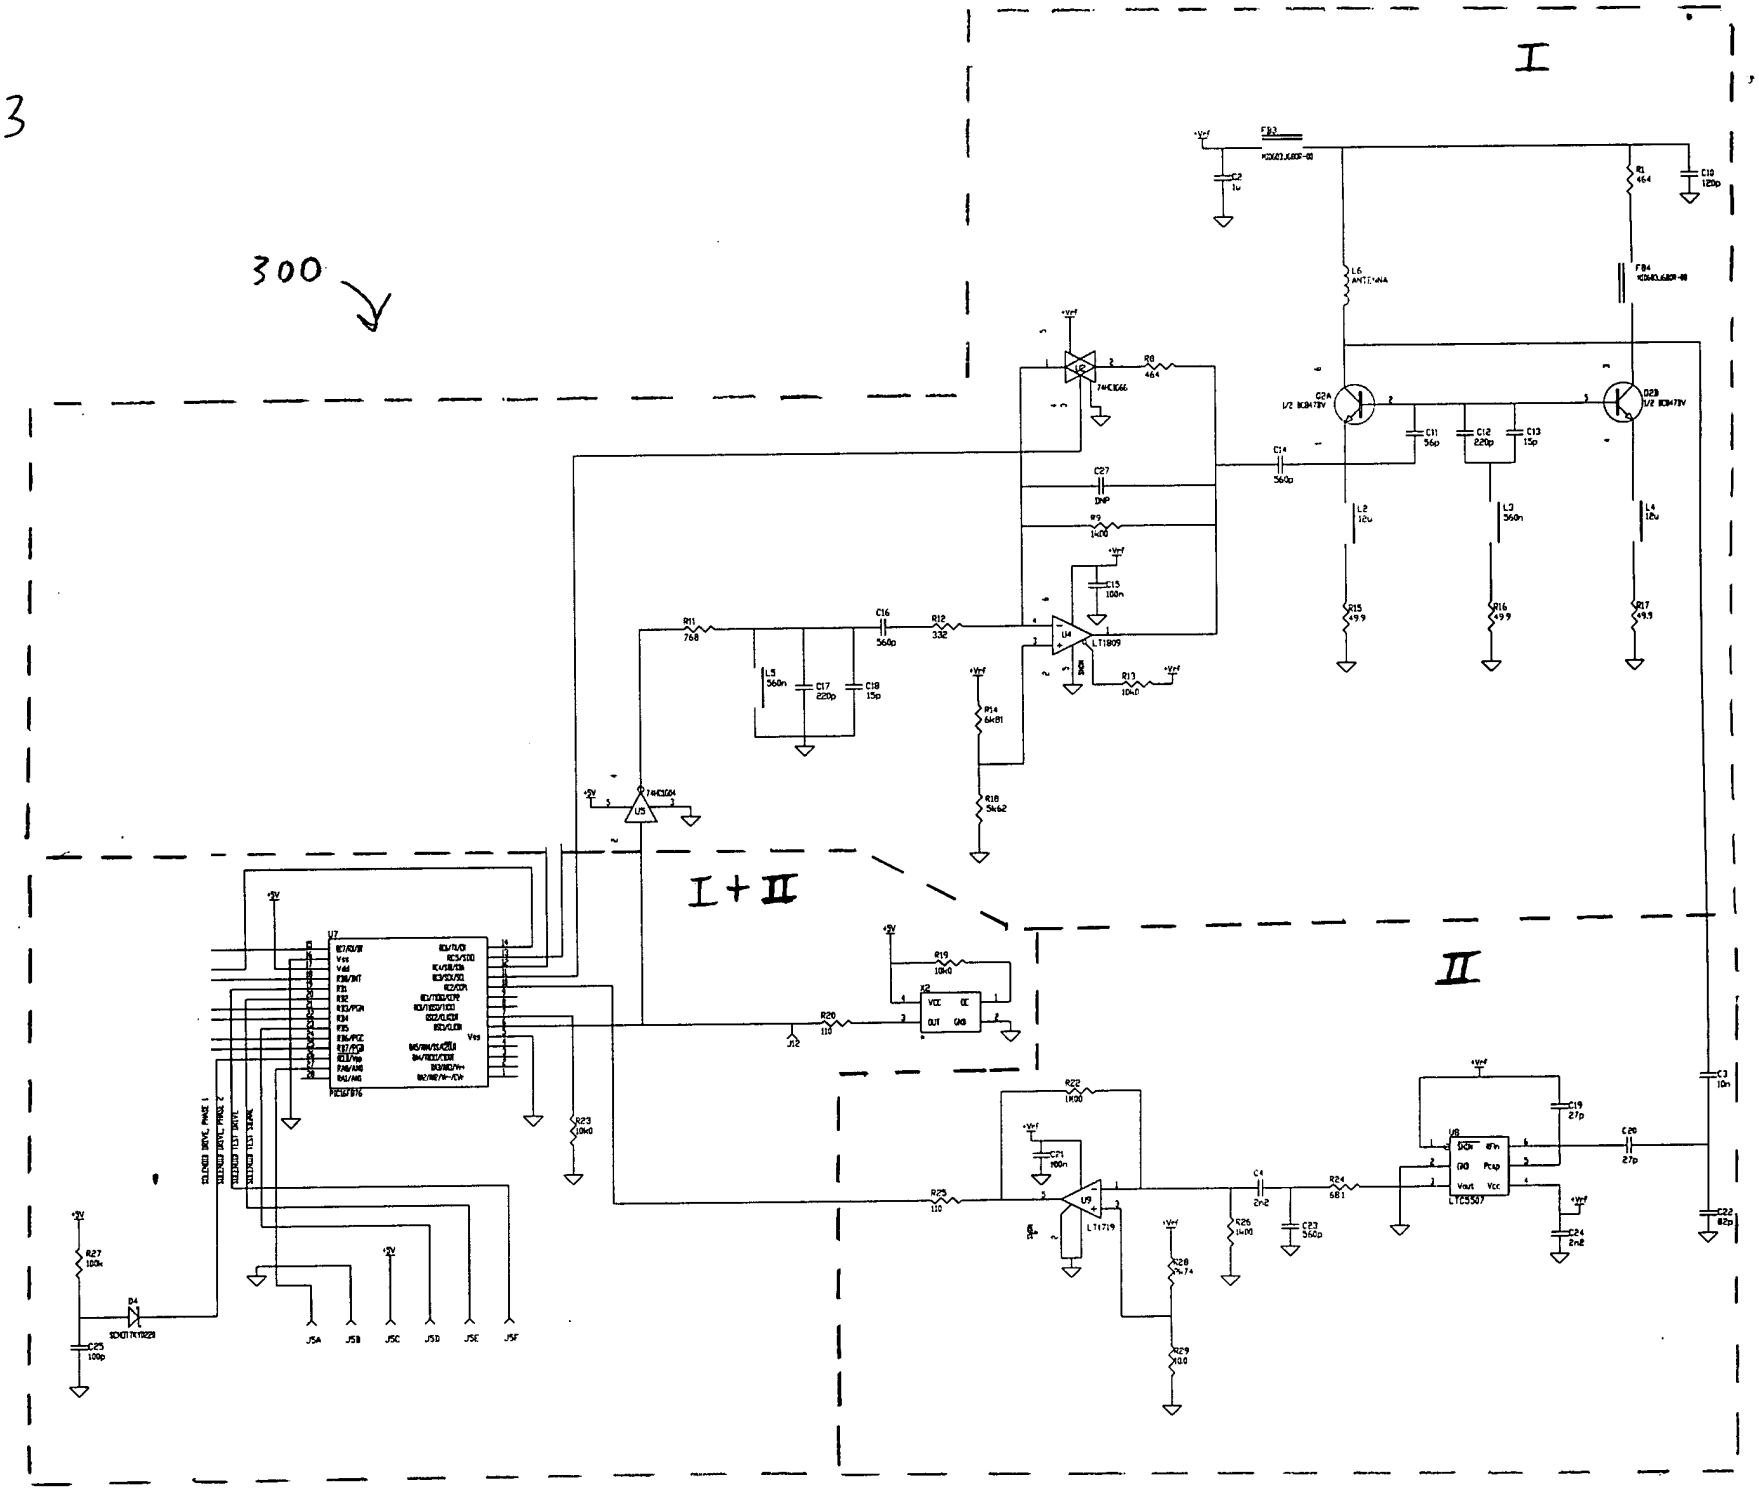

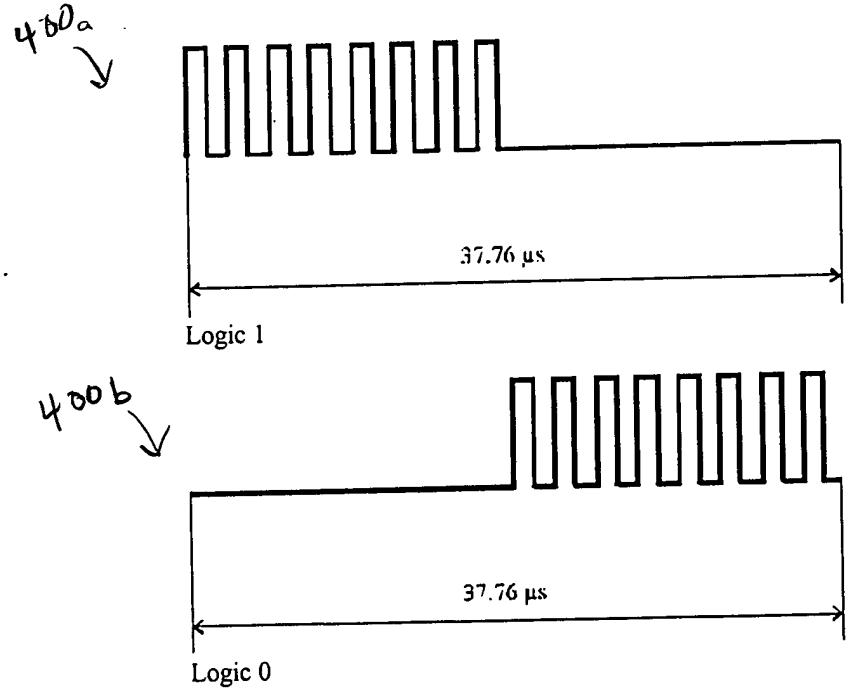

Fig. 4

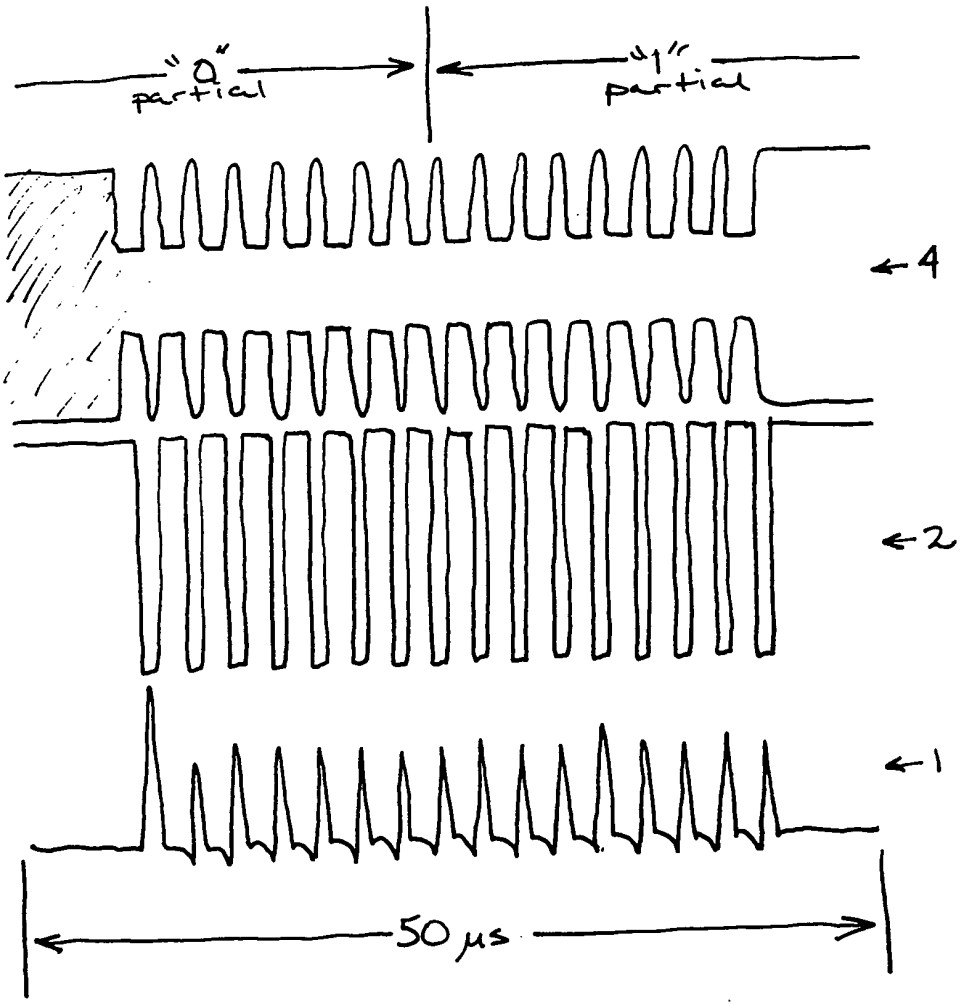

Fig. 5